

Application Note

Data Logging

ViewStream 300 | V.2.3

Table of Contents

- 1 Setup.....2
 - 1.1 Startup Configuration Mode2
 - 1.2 Enable/Disable Data Logging3
 - 1.3 Preparation4
 - 1.4 Connection.....5

- 2 Data Logging.....6
 - 2.1 GETLOG.....6
 - 2.2 Update.log7
 - 2.3 Log file8


1 Setup

1.1 Startup Configuration Mode

The enable/disable of Data Logging can be set in the Startup Configuration Mode. Connect a 8-button switch mount* to your ViewStream 300 and enter to Configuration mode menu.

The 8-button switch mount connections are shown in the following examples:


Example 1 – Connect 8-button switch mount to Remote Ext. connector on ViewStream 300 / M3-300

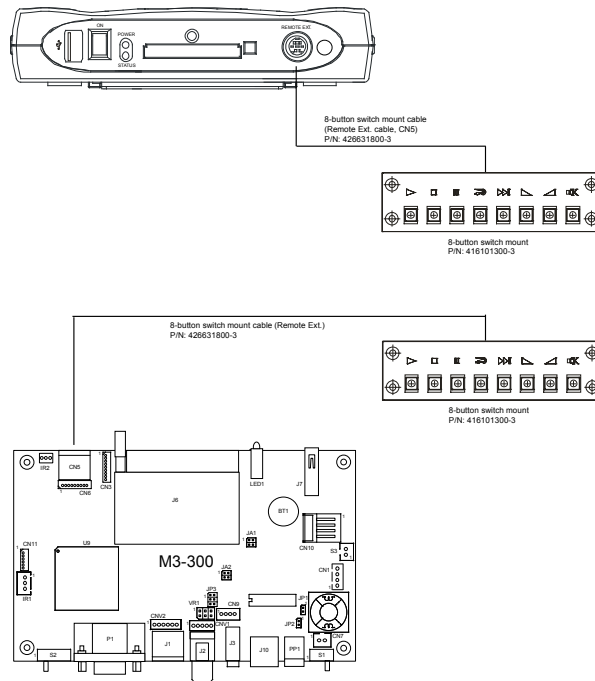

1.2 Enable/Disable Data Logging

The function of Data Logging can be switched to “ON” or “OFF” in the Configuration mode menu. (The default setting on Data Logging is OFF.)

- Holding button 8 and power on to enter the Configuration mode menu.

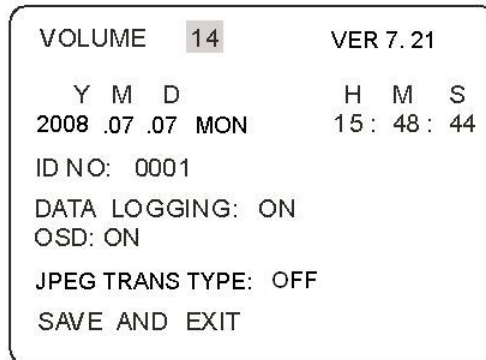


- Use button 8 to move to the “**DATA LOGGING**”. (The default is **OFF**)
- Press button 7 or button 6 to set “ON” or “OFF”.
- Use button 8 to move to **SAVE AND EXIT** and then press button 7 or button 6 to confirm save and exit.

1.3 Preparation

Enable Data Logging:

- Set “**DATA LOGGING**” to ON in the Configuration mode menu.

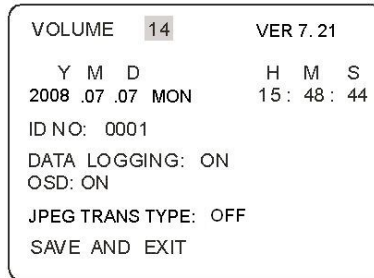


CompactFlash Card / SD card:

- Ensure the CompactFlash Card (or SD card if using ViewStream 505 or M3-320) has been inserted on ViewStream 300/505 or M3-300/320.
- Make sure a “**MEDIA**” folder is present on CompactFlash card (or SD card if using ViewStream 505 or M3-320).

USB flash drive:


- Ensure the USB flash drive has been formatted with FAT32.
- Create a new folder “**MEDIA**” on USB flash drive.
- Create a **blank** text file named “**GETLOG.INI**” on root directory. (The file just contains some space characters and file size must not be 0KB)

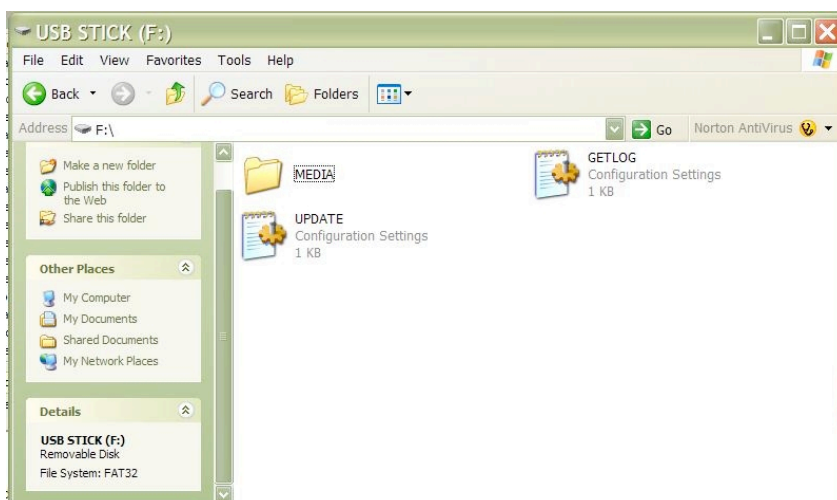

1.4 Connection

Connecting USB flash drive directly to the USB port on ViewStream 300

ViewStream 300/505 connection :




USB Memory Stick

2 Data Logging

2.1 GETLOG

1. Make sure the ViewStream 300 is powered off before inserting the CompactFlash Card and USB flash drive.
2. Power on the ViewStream 300 when both CompactFlash and USB flash drive are inserted.
3. When the GETLOG.ini file is detected on the USB flash drive, the Log file will be updated to the memory stick automatically. A sequence of screens will be shown as below:

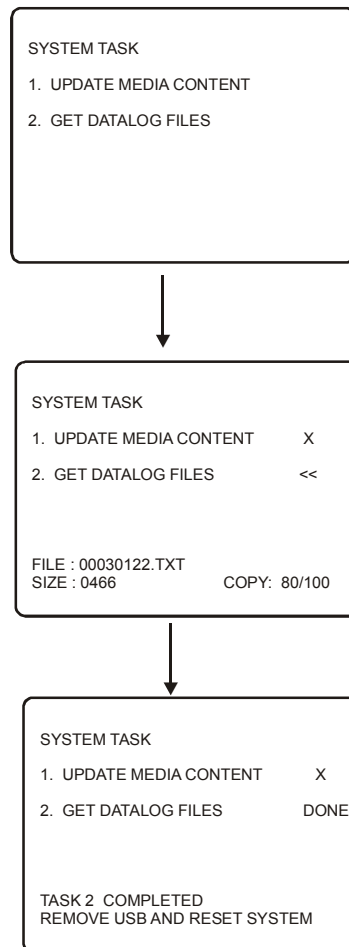

4. Once the file copy is completed, power off the ViewStream 300 unit and disconnect the memory stick.

Note: All media files must be stored and running inside the "MEDIA" folder on the CompactFlash card or SD card. The GETLOG.ini must be stored outside "MEDIA" folder.

2.2 Update.log

Another log file will be created on USB flash drive once the content upload process is done successfully. This file records the history of content updated as shown in the following example:

```
[Media Update Log]

ID No: 0000, Media content updated, 20060714, 11:43:13

1. Files present in both CF and USB
  -> Replace the files in CF by those in USB

  >> Files renewed in CF:
  IMG_0997.JPG
  IMG_0996.JPG
  IMG_0995.JPG
  IMG_1000.JPG
  IMG_0999.JPG
  IMG_0998.JPG
  2000KPT.AVI
  4720576.AVI

2. Files present in CF only
  -> Delete the files

  >> Files deleted from CF:
  No files needed to be deleted

3. Files present in USB only
  -> Copy the files from USB to CF

  >> Files newly added to CF:
  No files needed to be added :
```


2.3 Log file

The log file is written to the CF card (or SD card) as a file called “xxxxMMDD”.txt

Where xxxx = The four digit unique identifier of this player (ID)
MM = Month
DD = Day

Contact Details

USA: 18440 Technology Drive
Building 130
Morgan Hill, CA 95037

Tel: (1) 408-782 7773
Sales: info@dvsignage.com

Fax: (1) 408-782 7883

EUROPE: The Lake House,
Knebworth Park,
Hertfordshire, SG3 6PY
UK

Tel: +44 (0)20 7631 2150
Sales: info@dvsignage.com

Fax: +44 (0)20 7631 2156

ASIA: 16th floor Millennium City 3
370 Kwun Tong Road
Kwun Tong
Hong Kong

Tel: (852) 2861 3615
Sales: hk@dvsignage.com

Fax: (852) 2520 2987

www.dvsignage.com

All rights reserved: The concepts, designs, specifications and commands presented in this document are proprietary to DV Signage and are only made available for use with DV Signage products.

Specifications subject to change without notice